

<b>Codice articolo</b> <b>Product code:</b>	<b>2004221 – 204022 – 2004223 – 2004224 – 2004225 – 2004226 – 2004227</b>
<b>Descrizione</b> <b>Description:</b>	<b>STOA PRECABLATA SU 2 LATI</b> <b>OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS</b>



#### **Descrizione**

Scatola di terminazione ottica di appartamento (STOA) precablata da ambo i lati. Adatta all'utilizzo nelle infrastrutture ottiche multiservizio per la distribuzione dei servizi (connettività internet, antenna satellitare, digitale terrestre e altro) provenienti dal CSOE.  
Disponibile nelle versioni già precablate con cavo ottico da 20 fino a 80 mt.

#### **Caratteristiche principali**

<b>Struttura</b>	Scatola in materiale plastico dotata di 4 porte completa di 4 bussole SC/SC APC Simplex con shutter per la protezione dalla polvere, 1 vassoio portagiunti a 4 posizioni, cavo ottico da interno di lunghezza predefinita a 4 fibre monomodali tipo G.657.A2 già connesso da ambo i lati con connettori SC/APC
<b>Posizioni</b>	4 alloggiamenti per bussole SC-SC Simplex o LC-LC Duplex
<b>Installazione</b>	A parete o a incasso
<b>Dimensioni</b>	L100xP80xH29 mm
<b>Colore</b>	Bianco
<b>Cavo ottico</b>	4 fibre 9/125 tipo G.657.A Rivestimento primario fibre da 250 µm Riempitivo in filati aramidici Diametro: 2,5 mm Peso: 30 Kg/Km Tiro massimo: 120N Raggio curvatura dinamico: 20xOD Raggio curvatura statico: 15xOD Temperatura operativa: -20/+60° C Guaina LSZH Conforme Euroclasse Eca

#### **Description**

Home optical telecommunication wall outlet pre-wired on both ends. Suitable to be used in multifiber building systems for the distribution of connectivity services (antenna/satellite/cable TV signals or internet) provided by the Building Entry Point.  
Available pre-wired with optical cables from 20 to 80 mt long.

#### **General features**

<b>Structure</b>	Plastic 4-port box fitted with 4 SC/APC Simplex adapters with dust protection shutter, 1 splice tray 4 positions, indoor optical cable of preset length with 4 fibre SM type G.657.A2, pre-terminated with SC/APC connectors on both ends
<b>Ports</b>	4 blank ports suitable for the mounting of SC-SC Simplex or LC-LC Duplex adapters
<b>Installation</b>	On wall or recessed
<b>Dimensions</b>	L100xD80xH29 mm
<b>Color</b>	White
<b>Optical cable</b>	4 fibres 9/125 type G.657.A2 250 µm primary coating Water-blocking aramid yarn Diameter: 2,5 mm Weight: 30Kg/Km Tensile strength: 120N Min. dynamic bending radius: 20xOD Min. static bending radius: 15xOD Operating temperature: -20/+60° C Jacket LSZH Euroclass Eca compliant

#### **Versioni disponibili**

Precablata con 20 mt di cavo	Cod. 2004221
Precablata con 30 mt di cavo	Cod. 2004222
Precablata con 40 mt di cavo	Cod. 2004223
Precablata con 50 mt di cavo	Cod. 2004224
Precablata con 60 mt di cavo	Cod. 2004225
Precablata con 70 mt di cavo	Cod. 2004226
Precablata con 80 mt di cavo	Cod. 2004227

#### **Available versions**

Pre-wired with 20 mt	Cod. 2004221
Pre-wired with 30 mt	Cod. 2004222
Pre-wired with 40 mt	Cod. 2004223
Pre-wired with 50 mt	Cod. 2004224
Pre-wired with 60 mt	Cod. 2004225
Pre-wired with 70 mt	Cod. 2004226
Pre-wired with 80 mt	Cod. 2004227

#### **Confezionamento**

<b>Confezione</b>	Scatola in cartone – 1pz
<b>Peso</b>	1Kg


#### **Packaging**

<b>Package</b>	Cardboard box – 1pc
<b>Weight</b>	1 Kg

CCS Connectivity & Cabling System trademark registered by  
QUBIX S.p.A. Networking solutions – Via Canada, 22/A – 35127 Padova – Italy  
Tel. +39 049 7801994 – Fax +39 049 775667 – <http://www.qubix.it>

<b>Codice articolo</b> <b>Product code:</b>	<b>2004221 – 204022 – 2004223 – 2004224 – 2004225 – 2004226 – 2004227</b>
<b>Descrizione</b> <b>Description:</b>	<b>STOA PRECABLATA SU 2 LATI</b> <b>OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS</b>

**DISEGNO TECNICO/TECHNICAL DRAWINGS**

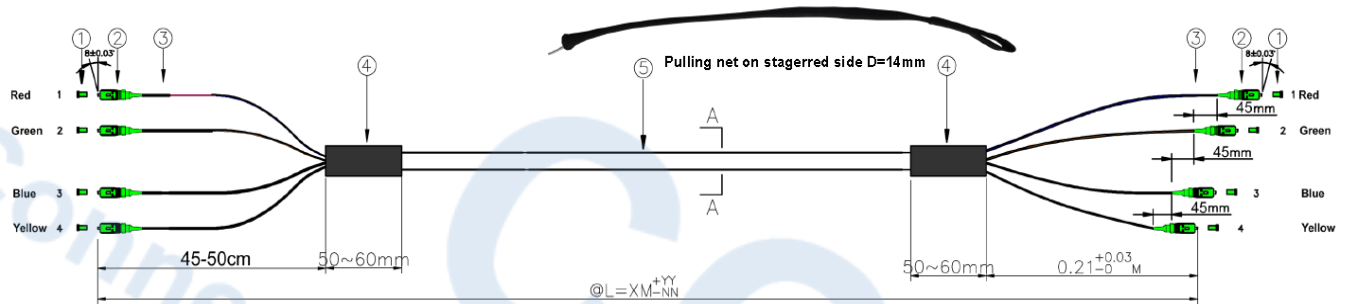

1	DUST CAP	Color: Green
2	CONNECTOR	Type: SC/APC Simplex - Boot color: green - Body color :green
3	0.9 mm BRANCH CABLE	Branch cables: diameter 0.9 mm - Colors: red, green, blue, yellow
4	HEAT SHRINK TUBE	Diameter: 3 mm - Color: black
5	OPTICAL CABLE	4 core 9/125 G.657.A2 - LSZH jacket - Diameter 2.5 mm - Color: white

